


Features


- Multiple variations available**
 - 0.5/1.0mm Pitch, 1.75/2.0mm Height, 5.7mm Mounting depth
- User-friendly design**
 - Actuator opens wide up to 110°
- High reliability**
 - High FPC retention force with FPC side-catch design
 - Solder wicking and flux penetration prevention




Multiple Pitch and Height Variations Available

Unit : mm

Pitch Variations

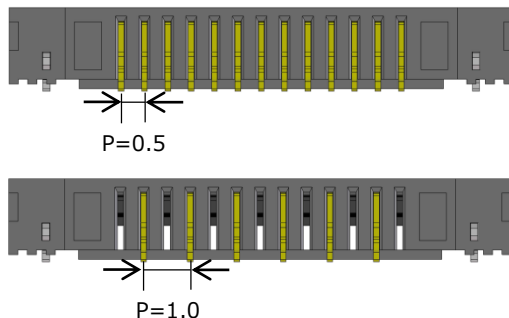

Height Variations

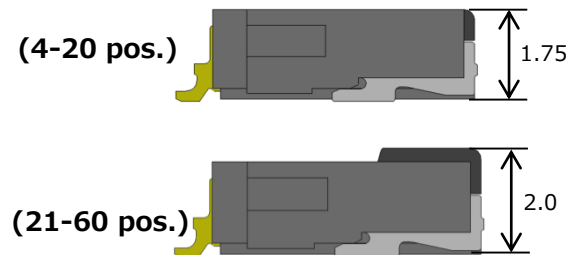

Specifications

Contact Resistance*1	50mΩ Max.
Withstanding Voltage	150V DC for 1 minute
Insulation Resistance	500MΩ Min. (100V DC)
Rated Current	0.5A
Rated Voltage	50V AC/DC
FPC/FFC Thickness	0.3±0.03mm

• RoHS compliant, Halogen-free product *2

*1 FPC resistance is included.

*2 This product satisfies halogen free requirements defined as 900ppm maximum chlorine, 900ppm maximum bromine, and 1,500ppm maximum total of chlorine and bromine.